


# Stretch to Fit

Now it's easy to replace old, worn out or missing oven door gaskets with new "Stretch to Fit" gaskets.

## Directions:

Drill 1/8" hole in each corner of the oven frame or range door. \*On porcelain surfaces first indenting slightly with punch and then drilling slowly by choosing a slow drill speed or by repeatedly cycling the drill on and off can help to avoid flaking.

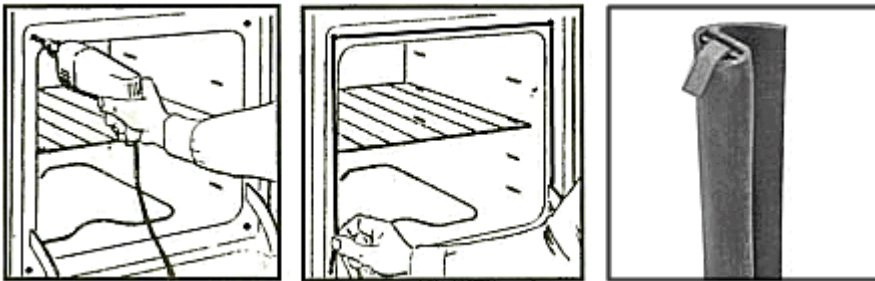

Measure hole to hole dimensions and choose appropriate gasket length from the available selection. The replacement gasket stretches between and mounts into the holes created, using the gasket retaining clips factory installed onto each end of the gasket.

One gasket length is required for each side of the oven opening needing a seal. Multiple shorter length seals can be used to cover a larger span for added support by drilling additional mounting holes.

\*\*Suitable for most conventional (i.e. non-self cleaning) ranges.

[www.Appliance411.com](http://www.Appliance411.com)

*The Appliance Information Site*